

## 应用领域

用于机器人、航空航天设备、高铁地铁、电力发电、铁路轨道交通、船舶、化学工业、通信系统、工程设备安装、工业自动化设备、机床机械设备、照明设备、电气绝缘保护系统等室内外环境的电线电缆保护。

# STAINLESS STEEL CABLE GLAND SERIES

## 不锈钢电缆接头系列

采用304不锈钢棒材制成，外型美观，用于紧固电线电缆，锁线范围大，并达到一定的防护等级和抗拉、抗扭能力，适用于电源进线、仪表、照明、监控、电箱等，各种化学污染及高腐蚀性行业。

螺纹选择：M公制螺纹、PG德制螺纹、G英制螺纹、NPT美标螺纹。

材质选择：304材质和316材质

防护等级：IP68

选型注意事项：常规产品，可根据页面型号进行选型，非标产品请联系我们销售或技术参与选型。

The cable gland series is used to tighten wires and cables, and to achieve a certain level of IP protection and tension resistance torsion resistance. Applied to the power line, instrumentation, lighting, monitoring system, electrical boxes, and many chemical pollution and high corrosive industries.

Thread: Metric, PG, G and NPT thread

Material: 304 & 316 stainless steel

Protection Degree: IP68

Selection precautions: Standard products can be selected according to the page model. For non-standard products, please contact us.





LNE-S 不锈钢电缆防水接头  
Stainless Steel Waterproof Cable Gland



产品材质: A.C.F部位采用优质304不锈钢制成, B.E部位采用三元乙丙橡胶制成, D部位采用白色尼龙制成。  
螺纹规格: 公制 (M)  
工作温度: -40°C至 +110°C, 短时可达 +120°C。  
产品颜色: A.C.F部位为金属色, B.E部分为黑色, D部分为白色。  
防护等级: IP68  
产品特性: 特殊夹紧爪与密封件相扣之设计, 配合迫紧头装配时便利, 夹紧电缆范围大, 抗拉力特强, 可防水、防尘、防盐、耐酸碱、耐腐蚀、酒精、油、脂。

**Product material:** Part A, C and F are 304 Stainless Steel material; Part B and E are EPDM material, and part D is white polyamide material.  
**Specification of thread:** Metric  
**Working temperature:** -40°C ~ +110°C, instantaneously can be 120°C.  
**Color:** Part A, C and F are Metallic yellow, Part B and E are black, Part D is white.  
**Protection classification:** IP68  
**Property:** With design of clamping claw and sealing, easy & fast assembled by sealing nut, have big cable clamping range, with high tensile strength, waterproof, dustproof, salt proof, acid and alkali resistant, corrosion, alcohol, oil & grease resistant.

| 订货号<br>Order No. | 螺纹标准(公制)<br>Thread standard(M) | 卡口范围(mm)<br>Range Of Bayonet | 螺纹外径(mm)<br>Thread Diameter | 螺纹长度(mm)<br>Thread Length | 扳手尺寸(mm)<br>Wrench | 包装单位(只/包)<br>Packaging Unit |
|------------------|--------------------------------|------------------------------|-----------------------------|---------------------------|--------------------|-----------------------------|
| No.              | M                              | Φ                            | AG                          | GL                        | SW                 | PCS                         |
| LNE-S-M8         | M8×1.0                         | 2-5.5                        | 8                           | 5                         | 12                 | 100                         |
| LNE-S-M10        | M10×1.0                        | 3-6.5                        | 10                          | 7                         | 14                 | 100                         |
| LNE-S-M12        | M12×1.5                        | 3-6.5                        | 12                          | 6                         | 15                 | 100                         |
| LNE-S-M14        | M14×1.5                        | 3-6.5                        | 14                          | 6                         | 17                 | 100                         |
| LNE-S-M16        | M16×1.5                        | 4-8                          | 16                          | 9                         | 20                 | 100                         |
| LNE-S-M18        | M18×1.5                        | 6-10                         | 18                          | 9                         | 21                 | 100                         |
| LNE-S-M20        | M20×1.5                        | 6-12(8-14)                   | 20                          | 9                         | 23                 | 50                          |
| LNE-S-M22        | M22×1.5                        | 10-14                        | 22                          | 9                         | 25                 | 50                          |
| LNE-S-M24        | M24×1.5                        | 10-14                        | 24                          | 10                        | 27                 | 50                          |
| LNE-S-M25        | M25×1.5                        | 10-14(13-18)                 | 25                          | 10                        | 30                 | 50                          |
| LNE-S-M27        | M27×2.0                        | 13-18                        | 27                          | 9                         | 35                 | 20                          |
| LNE-S-M30        | M30×2.0                        | 13-18                        | 30                          | 9                         | 46                 | 10                          |
| LNE-S-M32        | M32×1.5                        | 15-22                        | 32                          | 10                        | 60                 | 10                          |
| LNE-S-M33        | M33×2.0                        | 15-22                        | 33                          | 9                         | 75                 | 10                          |
| LNE-S-M36        | M36×2.0                        | 18-25                        | 36                          | 9                         | 30                 | 50                          |
| LNE-S-M40        | M40×1.5                        | 18-25                        | 40                          | 12                        | 34                 | 50                          |
| LNE-S-M42        | M42×2.0                        | 22-32                        | 42                          | 13                        | 38                 | 20                          |
| LNE-S-M48        | M48×2.0                        | 25-32                        | 48                          | 13                        | 42                 | 20                          |
| LNE-S-M50        | M50×1.5                        | 32-38                        | 50                          | 13                        | 50                 | 10                          |
| LNE-S-M54        | M54×2.0                        | 32-28                        | 54                          | 13                        | 56                 | 10                          |
| LNE-S-M56        | M56×2.0                        | 32-28                        | 56                          | 14                        | 62                 | 10                          |
| LNE-S-M60        | M60×2.0                        | 37-44                        | 60                          | 14                        | 65                 | 10                          |
| LNE-S-M63        | M63×1.5                        | 37-44                        | 63                          | 13                        | 70                 | 10                          |
| LNE-S-M64        | M64×2.0                        | 37-44                        | 64                          | 14                        | 75                 | 10                          |
| LNE-S-M72        | M72×2.0                        | 42-52                        | 72                          | 15                        | 85                 | 5                           |
| LNE-S-M80        | M80×2.0                        | 50-60                        | 80                          | 15                        | 95                 | 5                           |
| LNE-S-M85        | M85×2.0                        | 59-72                        | 85                          | 20                        | 100                | 5                           |
| LNE-S-M100       | M100×2.0                       | 70-82                        | 100                         | 20                        | 120                | 1                           |

LNE-S 不锈钢电缆防水接头  
Stainless Steel Waterproof Cable Gland




产品材质: A.C.F部位采用优质304不锈钢制成, B.E部位采用三元乙丙橡胶制成, D部位采用白色尼龙制成。  
螺纹规格: 德制 (PG)、英制 (G) 【美制(NPT)可定制】  
工作温度: -40°C至 +110°C, 短时可达 +120°C。  
产品颜色: A.C.F部位为金属色, B.E部分为黑色, D部分为白色。  
防护等级: IP68  
产品特性: 特殊夹紧爪与密封件相扣之设计, 配合迫紧头装配时便利, 夹紧电缆范围大, 抗拉力特强, 可防水、防尘、防盐、耐酸碱、耐腐蚀、酒精、油、脂。

**Product material:** Part A, C and F are 304 Stainless Steel material; Part B and E are EPDM material, and part D is white polyamide material.  
**Specification of thread:** PG, G(NPT can be customized)  
**Working temperature:** -40°C ~ +110°C, instantaneously can be 120°C.  
**Color:** Part A, C and F are Metallic yellow, Part B and E are black, Part D is white.  
**Protection classification:** IP68  
**Property:** With design of clamping claw and sealing, easy & fast assembled by sealing nut, have big cable clamping range, with high tensile strength, waterproof, dustproof, salt proof, acid and alkali resistant, corrosion, alcohol, oil & grease resistant.

| 订货号<br>Order No. | 螺纹标准(德制)<br>Thread standard(PG) | 卡口范围(mm)<br>Range Of Bayonet | 螺纹外径(mm)<br>Thread Diameter | 螺纹长度(mm)<br>Thread Length | 扳手尺寸(mm)<br>Wrench | 包装单位(只/包)<br>Packaging Unit |
|------------------|---------------------------------|------------------------------|-----------------------------|---------------------------|--------------------|-----------------------------|
| No.              | PG                              | Φ                            | AG                          | GL                        | SW                 | PCS                         |
| LNE-S-PG7        | PG7                             | 3-6.5                        | 12.5                        | 6                         | 15                 | 100                         |
| LNE-S-PG9        | PG9                             | 4-8                          | 15.2                        | 7                         | 20                 | 100                         |
| LNE-S-PG11       | PG11                            | 5-10                         | 18.6                        | 7                         | 21                 | 100                         |
| LNE-S-PG13.5     | PG13.5                          | 8-12                         | 20.4                        | 8                         | 23                 | 50                          |
| LNE-S-PG16       | PG16                            | 10-14                        | 22.5                        | 8                         | 25                 | 50                          |
| LNE-S-PG21       | PG21                            | 13-18                        | 28.3                        | 8                         | 32                 | 50                          |
| LNE-S-PG29       | PG29                            | 18-25                        | 37                          | 9                         | 42                 | 20                          |
| LNE-S-PG36       | PG36                            | 25-32                        | 47                          | 10                        | 56                 | 10                          |
| LNE-S-PG42       | PG42                            | 32-38                        | 54                          | 10                        | 62                 | 10                          |
| LNE-S-PG48       | PG48                            | 37-44                        | 59.3                        | 12                        | 70                 | 10                          |

| 订货号<br>Order No. | 螺纹标准(英制)<br>Thread standard(G) | 卡口范围(mm)<br>Range Of Bayonet | 螺纹外径(mm)<br>Thread Diameter | 螺纹长度(mm)<br>Thread Length | 扳手尺寸(mm)<br>Wrench | 包装单位(只/包)<br>Packaging Unit |
|------------------|--------------------------------|------------------------------|-----------------------------|---------------------------|--------------------|-----------------------------|
| No.              | G                              | Φ                            | AG                          | GL                        | SW                 | PCS                         |
| LNE-S-G1/4       | G1/4                           | 3-6.5                        | 13.2                        | 6                         | 17                 | 100                         |
| LNE-S-G3/8       | G3/8                           | 4-8                          | 16.5                        | 8                         | 20                 | 100                         |
| LNE-S-G1/2       | G1/2                           | 8-12                         | 21.3                        | 8                         | 23                 | 50                          |
| LNE-S-G3/4       | G3/4                           | 13-18                        | 26.6                        | 9                         | 30                 | 50                          |
| LNE-S-G1         | G1                             | 15-22                        | 33.4                        | 10                        | 38                 | 20                          |
| LNE-S-G1-1/4     | G1-1/4                         | 18-25                        | 42.1                        | 12                        | 50                 | 10                          |
| LNE-S-G1-1/2     | G1-1/2                         | 22-32                        | 47.8                        | 13                        | 54                 | 10                          |
| LNE-S-G2         | G2                             | 37-44                        | 59.6                        | 13                        | 65                 | 10                          |

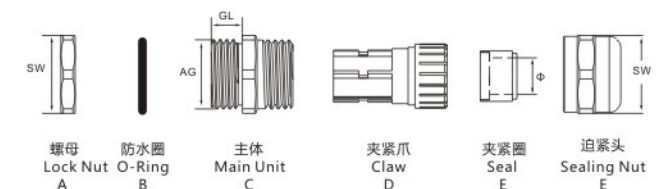




### LNE-SD 不锈钢多孔电缆防水接头 Stainless Steel Multi Entry Waterproof Cable Gland



产品材质: A.C.F部位采用优质304不锈钢制成, B.E部位采用三元乙丙橡胶制成, D部位采用白色尼龙制成。  
 螺纹规格: 德制 (PG)  
 工作温度: -40°C至 +110°C, 短时可达 +120°C。  
 产品颜色: A.C.F部位为金属色, B.E部分为黑色, D部分为白色。  
 防护等级: IP68  
 产品特性: 特殊夹紧爪与密封件相扣之设计, 配合迫紧头装配省时便利, 夹紧电缆范围大, 抗拉力特强, 可防水、防尘、防盐、耐酸碱、耐腐蚀、酒精、油、脂。

**Product material:** Part A, C and F are 304 Stainless Steel material; Part B and E are EPDM material, and part D is white polyamide material.  
**Specification of thread:** PG  
**Working temperature:** -40°C ~ +110°C, instantaneously can be 120°C.  
**Color:** Part A, C and F are Metallic yellow, Part B and E are black, Part D is white.  
**Protection classification:** IP68  
**Property:** With design of clamping claw and sealing, easy & fast assembled by sealing nut, have big cable clamping range, with high tensile strength, waterproof, dustproof, salt proof, acid and alkali resistant, corrosion, alcohol, oil & grease resistant.

| 订货号<br>Order No.     | 螺纹标准(德制)<br>Thread standard(PG) | 孔数X孔径(mm)<br>Hole CountXBore Diameter | 尺寸(mm)<br>Size | 螺纹长度(mm)<br>Thread Length | 扳手尺寸(mm)<br>Wrench | 包装单位(只/包)<br>Packaging Unit |
|----------------------|---------------------------------|---------------------------------------|----------------|---------------------------|--------------------|-----------------------------|
| No.                  | PG                              | HxB                                   | S              | GL                        | SW                 | PCS                         |
| LNE-SD-PG9/2X3       | PG9                             | 2X3                                   | 2X3            | 8                         | 20                 | 100                         |
| LNE-SD-PG9/4X1       | PG9                             | 4X1                                   | 1X4            | 8                         | 20                 | 100                         |
| LNE-SD-PG13.5/2X5    | PG13.5                          | 2X5                                   | 2X5            | 12                        | 23                 | 50                          |
| LNE-SD-PG13.5/7X2    | PG13.5                          | 7X2                                   | 7X2            | 12                        | 23                 | 50                          |
| LNE-SD-PG13.5/6X3    | PG13.5                          | 6X3                                   | 6X3            | 12                        | 23                 | 50                          |
| LNE-SD-PG16/2X6      | PG16                            | 2X6                                   | 2X6            | 13                        | 25                 | 50                          |
| LNE-SD-PG21/4X6      | PG21                            | 4X6                                   | 4X6            | 14                        | 32                 | 50                          |
| LNE-SD-PG21/2X7      | PG21                            | 2X7                                   | 2X7            | 14                        | 32                 | 50                          |
| LNE-SD-PG21/3X7      | PG21                            | 3X7                                   | 3X7            | 14                        | 32                 | 50                          |
| LNE-SD-PG21/2X6/2X10 | PG21                            | 2X6/2X10                              | 2X(6-10)       | 14                        | 32                 | 50                          |
| LNE-SD-PG21/2X8      | PG21                            | 2X8                                   | 2X8            | 14                        | 32                 | 50                          |
| LNE-SD-PG21/2X6      | PG21                            | 2X6                                   | 2X6            | 14                        | 32                 | 50                          |
| LNE-SD-PG21/3X7      | PG21                            | 3X7                                   | 3X7            | 14                        | 32                 | 50                          |
| LNE-SD-PG29/3X9      | PG29                            | 3X9                                   | 3X9            | 15                        | 42                 | 20                          |
| LNE-SD-PG29/2X8.5    | PG29                            | 2X8.5                                 | 2X8.5          | 15                        | 42                 | 20                          |
| LNE-SD-PG29/4X9      | PG29                            | 4X9                                   | 4X9            | 15                        | 42                 | 20                          |
| LNE-SD-PG29/2X12     | PG29                            | 2X12                                  | 2X12           | 15                        | 42                 | 20                          |
| LNE-SD-PG36/2X15     | PG36                            | 2X15                                  | 2X15           | 15                        | 56                 | 10                          |
| LNE-SD-PG36/5X9      | PG36                            | 5X9                                   | 5X9            | 15                        | 56                 | 10                          |

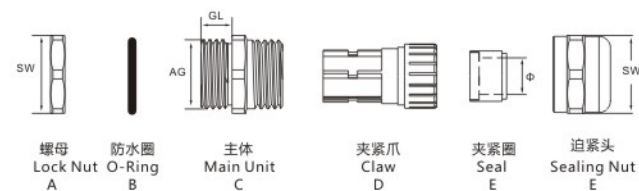

### LNE-SFW 不锈钢防折断电缆防水接头 Stainless Steel Anti Breaking Waterproof Cable Gland




产品材质: 采用优质304不锈钢制成, O型密封圈采用三元乙丙橡胶制成。  
 螺纹规格: 公制(M)、德制(PG)  
 工作温度: -40°C至 +110°C, 短时可达 +120°C。  
 防护等级: IP68  
 产品特性: 夹紧爪与夹紧圈一体成型之设计, 配合迫紧头装配省时便利, 夹紧电缆范围大, 抗拉力强, 可防水、防尘、抗盐、耐酸碱、耐腐蚀、酒精、油、脂。

**Product material:** 304 Stainless Steel, sealing are EPDM material  
**Thread specifications:** Metric, PG  
**Protection classification:** IP68  
**Working temperature:** -40°C ~ +110°C, instantaneously can be 120°C  
**Property:** With design of clamping claw and sealing, easy & fast assembled by sealing nut, have big cable clamping range, with high tensile strength, waterproof, dustproof, salt proof, acid and alkali resistant, corrosion, alcohol, oil & grease resistant.

| 订货号<br>Order No. | 螺纹标准(公制)<br>Thread standard(M) | 卡口范围(mm)<br>Range Of Bayonet | 外径(mm)<br>Outer Diameter | (mm)<br>D | 螺纹长度(mm)<br>Thread Length | 扳手尺寸(mm)<br>Wrench | 包装单位(只/包)<br>Packaging Unit |
|------------------|--------------------------------|------------------------------|--------------------------|-----------|---------------------------|--------------------|-----------------------------|
| No.              | M                              | Φ                            | AG                       | D         | GL                        | SW                 | PCS                         |
| LNE-SFW-M12      | M12                            | 3-6                          | 12                       | 6.8       | 6.5                       | 14.0               | 50                          |
| LNE-SFW-M16      | M16                            | 4-8                          | 16                       | 10.3      | 6.0                       | 20.0               | 50                          |
| LNE-SFW-M18      | M18                            | 5-10                         | 20                       | 14.3      | 6.0                       | 24.0               | 50                          |
| LNE-SFW-M20      | M20                            | 6-12                         | 25                       | 18.4      | 7.0                       | 30.0               | 50                          |
| LNE-SFW-M25      | M25                            | 8-16                         | 25                       | 18.4      | 7.0                       | 30.0               | 50                          |
| LNE-SFW-M32      | M32                            | 15-22                        | 25                       | 18.4      | 7.0                       | 30.0               | 20                          |
| LNE-SFW-M40      | M40                            | 21-30                        | 25                       | 18.4      | 7.0                       | 30.0               | 20                          |

| 订货号<br>Order No. | 螺纹标准(德制)<br>Thread standard(PG) | 卡口范围(mm)<br>Range Of Bayonet | 外径(mm)<br>Outer Diameter | (mm)<br>D | 螺纹长度(mm)<br>Thread Length | 扳手尺寸(mm)<br>Wrench | 包装单位(只/包)<br>Packaging Unit |
|------------------|---------------------------------|------------------------------|--------------------------|-----------|---------------------------|--------------------|-----------------------------|
| No.              | PG                              | Φ                            | AG                       | D         | GL                        | SW                 | PCS                         |
| LNE-SFW-PG7      | PG7                             | 3-6                          | 12.5                     | 6.8       | 6.0                       | 15.0               | 50                          |
| LNE-SFW-PG9      | PG9                             | 4-8                          | 15.2                     | 8.2       | 7.0                       | 18.0               | 50                          |
| LNE-SFW-PG11     | PG11                            | 5-10                         | 18.6                     | 10.3      | 7.5                       | 21.5               | 50                          |
| LNE-SFW-PG13.5   | PG13.5                          | 6-12                         | 20.4                     | 12.3      | 8.0                       | 23.5               | 50                          |
| LNE-SFW-PG16     | PG16                            | 7-14                         | 22.5                     | 14.3      | 8.8                       | 25.5               | 50                          |
| LNE-SFW-PG21     | PG21                            | 13-18                        | 28.3                     | 18.4      | 9.3                       | 32.3               | 50                          |
| LNE-SFW-PG29     | PG29                            | 18-25                        | 28.3                     | 18.4      | 9.3                       | 32.3               | 20                          |

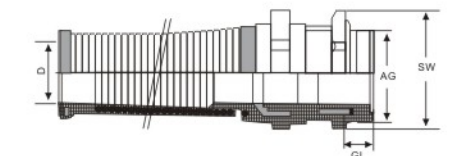



LNE-RCK 不锈钢铠装隔爆型电缆防水接头  
Stainless Steel Explosion-Resistant Cable Gland



产品材质: 采用优质304不锈钢制成, 密封件采用硅橡胶、氯丁橡胶。  
工作温度: -40°C至+100°C  
防护等级: IP68  
螺纹规格: 公制 (M)、美制 (NPT)  
应用领域: 适用于1区、2区危险气体区域和21区和22区粉尘易爆区域, 室内室外均可使用。

**Product material:** 304 stainless steel, sealed are silicone rubber and neoprene.  
**Working temperature:** -40°C~+100°C  
**Protection classification:** IP68  
**Thread specification:** Metric, NPT  
**Application:** For the dangerous gas area in zone 1 and 2 and the dust explosive area in zone 21 and 22. It can be used both indoors and outdoors.

| 订货号<br>Order No. | 螺纹标准(公制)<br>Thread standard(M) | 电缆外径<br>Cable Outer(Φ) | 铠装层<br>Armour | 电缆内径<br>Cable Inner(Φ) | 螺纹长度<br>Thread length | 扳手尺寸(mm)<br>Spanner Size | 扳手尺寸(mm)<br>Spanner Size |
|------------------|--------------------------------|------------------------|---------------|------------------------|-----------------------|--------------------------|--------------------------|
| No.              | M                              | D                      | A             | C                      | GL                    | E                        | F                        |
| LNE-RCK12-1      | M12×1.5                        | 6-12                   | 0-0.9         | 4-8                    | 15                    | 19                       | 19                       |
| LNE-RCK16-1      | M16×1.5                        | 6-12                   | 0-0.9         | 4-8.5                  | 15                    | 19                       | 19                       |
| LNE-RCK16-2      | M16×1.5                        | 8.5-16                 | 0-1.25        | 6-12                   | 15                    | 24                       | 24                       |
| LNE-RCK20-1      | M20×1.5                        | 6-12                   | 0-0.9         | 4-8.5                  | 15                    | 19                       | 24                       |
| LNE-RCK20-2      | M20×1.5                        | 8.5-16                 | 0-1.25        | 6-12                   | 15                    | 24                       | 24                       |
| LNE-RCK20-3      | M20×1.5                        | 12-21                  | 0-1.25        | 8.5-15.5               | 15                    | 30                       | 30                       |
| LNE-RCK25-1      | M25×1.5                        | 8.5-16                 | 0-1.25        | 6-12                   | 15                    | 24                       | 30                       |
| LNE-RCK25-2      | M25×1.5                        | 12-21                  | 0-1.25        | 8.5-16                 | 15                    | 30                       | 30                       |
| LNE-RCK25-3      | M25×1.5                        | 16-27.5                | 0-1.6         | 12-20.5                | 15                    | 41                       | 41                       |
| LNE-RCK32-1      | M32×1.5                        | 16-27.5                | 0-1.6         | 12-21                  | 15                    | 41                       | 41                       |
| LNE-RCK32-2      | M32×1.5                        | 21-34                  | 0-2           | 16-27.5                | 15                    | 48                       | 48                       |
| LNE-RCK40-1      | M40×1.5                        | 21-34                  | 0-2           | 16-27.5                | 15                    | 48                       | 48                       |
| LNE-RCK40-2      | M40×1.5                        | 27-41                  | 0-2           | 21-34                  | 15                    | 55                       | 55                       |
| LNE-RCK50-1      | M50×1.5                        | 27-41                  | 0-2           | 21-34                  | 16                    | 55                       | 55                       |
| LNE-RCK50-2      | M50×1.5                        | 33-48                  | 0-2.5         | 27-41                  | 16                    | 64                       | 64                       |
| LNE-RCK63-1      | M63×1.5                        | 40-56                  | 0-2.5         | 33-48                  | 17                    | 72                       | 72                       |
| LNE-RCK63-2      | M63×1.5                        | 47-65                  | 0-2.5         | 40-56                  | 17                    | 85                       | 85                       |
| LNE-RCK75-1      | M75×1.5                        | 47-65                  | 0-2.5         | 40-56                  | 18                    | 85                       | 85                       |
| LNE-RCK75-2      | M75×1.5                        | 54-74                  | 0-2.5         | 47-65                  | 18                    | 95                       | 95                       |
| LNE-RCK80-1      | M80×1.5                        | 54-74                  | 0-3.15        | 47-65                  | 20                    | 95                       | 95                       |
| LNE-RCK80-2      | M80×1.5                        | 63-83                  | 0-3.15        | 54-73                  | 20                    | 110                      | 110                      |
| LNE-RCK90-1      | M90×1.5                        | 63-83                  | 0-3.15        | 54-74                  | 22                    | 110                      | 110                      |
| LNE-RCK90-2      | M90×1.5                        | 72-93                  | 0-3.15        | 63-82                  | 22                    | 120                      | 120                      |
| LNE-RCK90-3      | M90×1.5                        | 85-107                 | 0-3.15        | 72-93                  | 22                    | 135                      | 120                      |

| 订货号<br>Order No. | 螺纹标准(美制)<br>Thread standard(NPT) | 电缆外径<br>Cable Outer(Φ) | 铠装层<br>Armour | 电缆内径<br>Cable Inner(Φ) | 螺纹长度<br>Thread length | 扳手尺寸(mm)<br>Spanner Size | 扳手尺寸(mm)<br>Spanner Size |
|------------------|----------------------------------|------------------------|---------------|------------------------|-----------------------|--------------------------|--------------------------|
| No.              | NPT                              | D                      | A             | C                      | GL                    | E                        | F                        |
| LNE-RCK12-1      | 1/2NPT                           | 6-12                   | 0-0.9         | 4-8.5                  | 16                    | 19                       | 24                       |
| LNE-RCK12-2      | 1/2NPT                           | 8.5-16                 | 0-1.25        | 6-12                   | 16                    | 24                       | 24                       |
| LNE-RCK12-3      | 1/2NPT                           | 12-21                  | 0-1.25        | 8.5-15.5               | 16                    | 30                       | 30                       |
| LNE-RCK34-1      | 3/4NPT                           | 8.5-16                 | 0-1.25        | 6-12                   | 16                    | 24                       | 30                       |
| LNE-RCK34-2      | 3/4NPT                           | 12-21                  | 0-1.25        | 8.5-16                 | 16                    | 30                       | 30                       |
| LNE-RCK34-3      | 3/4NPT                           | 16-27.5                | 0-1.6         | 12-20.5                | 16                    | 41                       | 41                       |
| LNE-RCK1-1       | 1NPT                             | 16-27.5                | 0-1.6         | 12-21                  | 20                    | 41                       | 41                       |
| LNE-RCK1-2       | 1NPT                             | 21-34                  | 0-2           | 16-26                  | 20                    | 48                       | 48                       |
| LNE-RCK114-1     | 1-1/4NPT                         | 21-34                  | 0-2           | 16-27.5                | 20                    | 48                       | 48                       |
| LNE-RCK114-2     | 1-1/4NPT                         | 27-41                  | 0-2           | 21-34                  | 20                    | 55                       | 55                       |
| LNE-RCK112-1     | 1-1/2NPT                         | 27-41                  | 0-2           | 21-34                  | 20                    | 55                       | 55                       |
| LNE-RCK112-2     | 1-1/2NPT                         | 33-48                  | 0-2.5         | 27-41                  | 20                    | 64                       | 64                       |
| LNE-RCK2-1       | 2NPT                             | 40-56                  | 0-2.5         | 33-48                  | 20                    | 72                       | 72                       |
| LNE-RCK2-2       | 2NPT                             | 47-65                  | 0-2.5         | 40-53                  | 20                    | 85                       | 85                       |
| LNE-RCK212-1     | 2-1/2NPT                         | 47-65                  | 0-2.5         | 40-56                  | 28                    | 85                       | 85                       |
| LNE-RCK212-2     | 2-1/2NPT                         | 54-74                  | 0-2.5         | 47-62.5                | 28                    | 95                       | 95                       |
| LNE-RCK3-1       | 3NPT                             | 63-83                  | 0-3.15        | 54-74                  | 30                    | 110                      | 110                      |
| LNE-RCK3-2       | 3NPT                             | 72-93                  | 0-3.15        | 63-78                  | 30                    | 120                      | 120                      |

不锈钢铠装隔爆型电缆防水接头  
STAINLESS STEEL  
EXPLOSION-RESISTANT  
CABLE GLAND



适用于1区、2区危险气体区域和21区和22区粉尘易爆区域, 室内室外均可使用。